

F26-32.768-12.5-48-2R

■ Tuning Fork Crystal 32.768KHz Gullwing


- Tuning fork crystal resonators
- Frequency range : 32.768KHz
- RoHS Compliant



■ Standard Specification

Frequency Range	32.768KHz
Load Capacitance	12.5pF
Drive Level	1.0uW Max
Frequency Tolerance at 25C	±20ppm Max
Temperature Stability	±100ppm Max
Motinal resistance (ESR)	50K ohm Max
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +85°C
Shunt Capacitance	1.5pF Typical
Load Capacitance	12.5pF
Aging first year max	±3ppm
Insulation Resistance	500M ohm Max
Packing	Tape & Reel

■ Dimensions (mm)

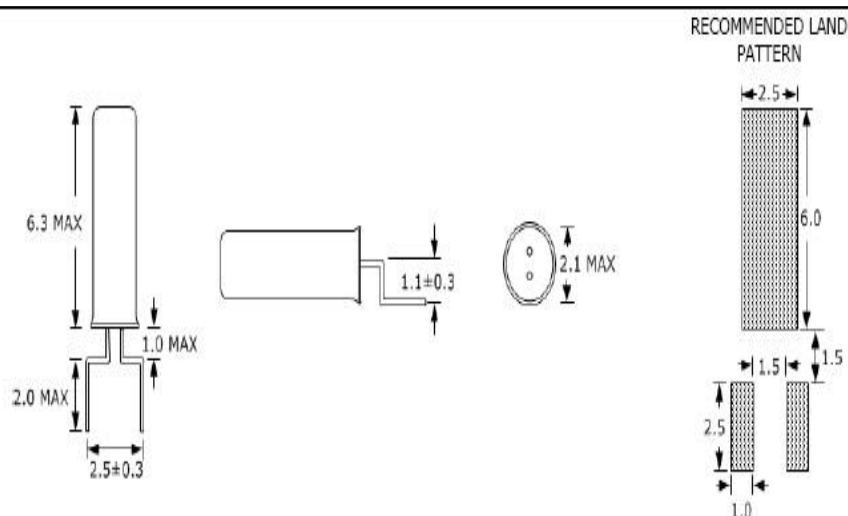

NOTE: Dimensions in millimeters (mm).